


LOAD CHARTS AND SPECIFICATIONS

80 MAXIMUM RATED LOAD IN LBS. WITH OUTRIGGERS FULLY EXTENDED 85												
90° Loaded Operating Radius	Loaded Boom Angle	Retracted Boom Length	Loaded Boom Angle	Boom Length	Loaded Boom Angle	Boom Length	Loaded Boom Angle	Boom Length	Loaded Boom Angle	Boom Length	Loaded Boom Angle	Extended Boom Length
ft	°	30ft 2in	°	35ft	°	45 ft	°	55 ft	°	65 ft	°	74ft 8in
10	65	65,000	68	54,000	73	50,000	76	45,000				
12	60	58,000	65	54,000	71	50,000	74	45,000	77	35,000		
15	54	46,000	59	45,000	66	44,000	71	38,000	74	32,000	76	30,000
20	40	33,500	49	33,500	59	33,500	65	32,000	69	29,000	72	26,000
25	21	25,500	37	25,500	52	26,000	60	25,000	65	23,000	68	22,000
30			21	20,500	43	21,000	53	20,000	60	19,500	64	19,000
35					32	17,000	46	17,000	54	16,000	59	15,500
40					17	14,000	39	14,000	49	13,500	55	13,500
45							29	12,000	42	12,000	50	12,000
50							15	10,500	35	10,500	45	10,500
55									27	9,000	39	9,000
60									14	8,000	33	8,000
65											24	7,000
70											12	6,500

Ratings above the heavy line are based on structural competence and not machine stability.

NOTE: Deductions must be made from rated loads for lifting accessories: overhaul balls, load hooks, snatch blocks and load blocks.

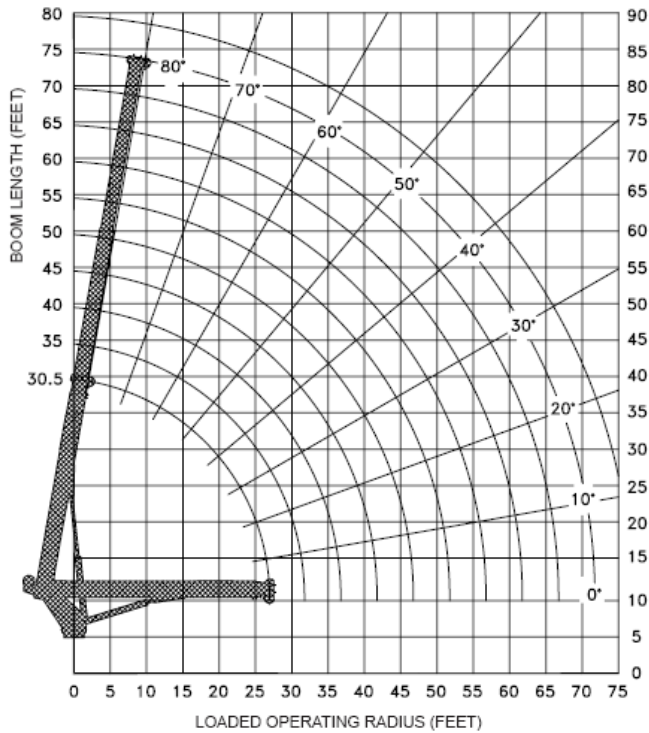

Maximum Loads 5/8" Cable	
1 Part Line 9,000 lbs	4 Part Line 36,000 lbs
2 Part Line 18,000 lbs	5 Part Line 45,000 lbs
3 Part Line 27,000 lbs	6 Part Line 54,000 lbs